

Red Parachute Signal Rocket

The Comet Red Parachute Signal Rocket conforms to SOLAS 74 as amended. Designed to withstand exceptional environmental exposure and to perform reliably even after immersion in water, the pull wire igniter and improved grip provides easy handling. Ejecting a red flare suspended on a parachute at 300m (985ft), burning for 40 seconds at 30,000 candela.



APPLICATION

A day or night long-range distress signal. It may be carried on ships bridge and there is a requirement for 4 in ships lifeboats and liferafts. Also suitable for use in other commercial and recreational boats.

FEATURES

- Universally recognised distress signal
- Visible up to 25 miles to support localised rescue
- SOLAS requires 12 rockets to be carried on a ships bridge

APPROVALS


Conforms to SOLAS 74 as amended, IMO Resolution 81(70) and 96/98/EC. MED, USCG/UK MER and other major maritime authorities worldwide. BGV 425005-00, BAM-P2-0059, 0589-P2-0046.

STORAGE

Ideally, should be stored in the robust, specially designed Polybottle, or in a dry, easily accessed location at ambient temperature.



Red Parachute Signal Rocket

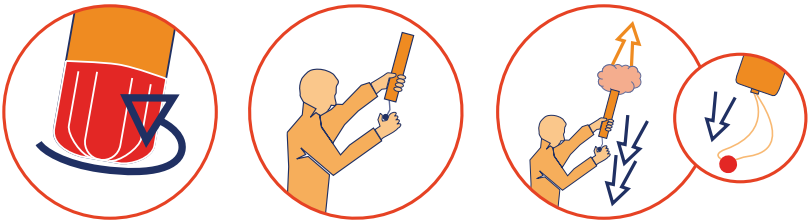

OPERATION

- 1. Hold signal firmly by ribbed handle. Unscrew RED bottom cap. Do not point at people or property.
- 2. Hold rocket vertically above head pointing away from body.
- 3. Ensure hands remain clear of top. To fire – pull red ball sharply down.


WARNING

- Ejects rocket projectile – do not point at people
- Do not fire in a confined space
- Keep out of reach of children
- Only for emergency use at sea
- If damaged or dented do not use
- Do not dismantle
- Keep away from source of heat
- Do not use after expiry date



DISPOSAL

Pyrotechnics must be treated as hazardous items and must be disposed of responsibly in accordance with local regulations.

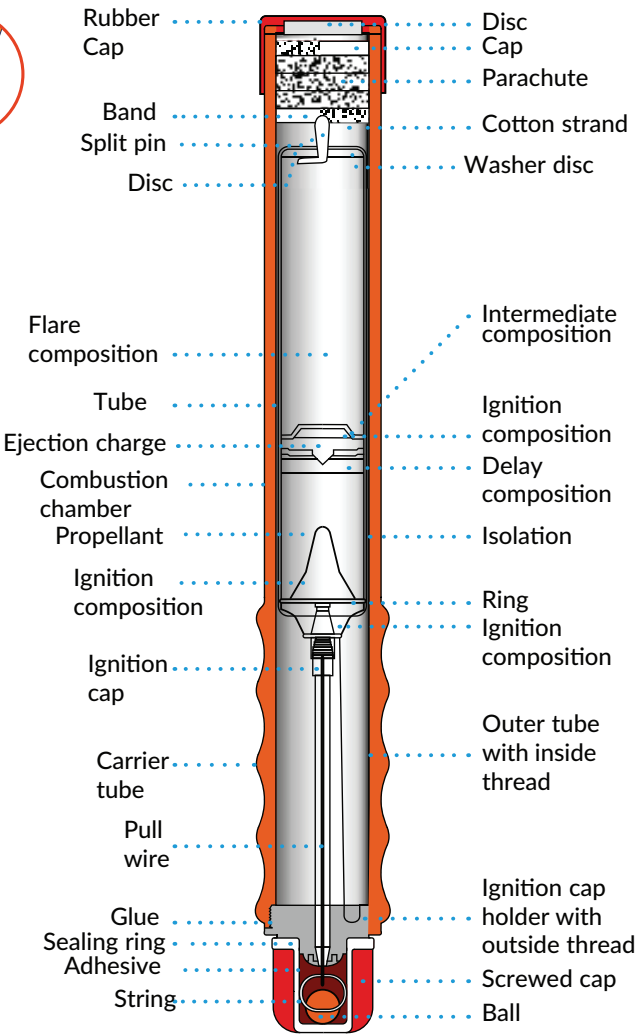

SPECIFICATIONS		SHIPPING INFORMATION	
Length	287 mm (11.3")	UN Number	0505
Diameter at handle	38 mm (1.5")	Proper Shipping Name	Signals, Distress, Ship
Diameter	32 mm (1.25")	Quantity per Box	56 rockets
Weight Max	245 g (8.23 oz)	Box Type	2 metal tins in a fibreboard box
NEC Max	92 g (3.25 oz)	Measurements of fibreboard box	47 x 27 x 35 cm (18.5 x 10.6 x 13.8 in)
Light intensity	30,000 candela	Net Weight Max	13.7 kg (30.20 lb.)
Burning time	40 seconds	Net Explosive Content per box Max	5.152 kg (11.36 lb.)
Colour of light	Red	Other Information	Cargo Aircraft Only
Ignition	Pull-wire ignitor	Hazard Class	1.4G
Altitude	300m (985')	Gross Weight	16.3kg (35.93lb.)